




NEW

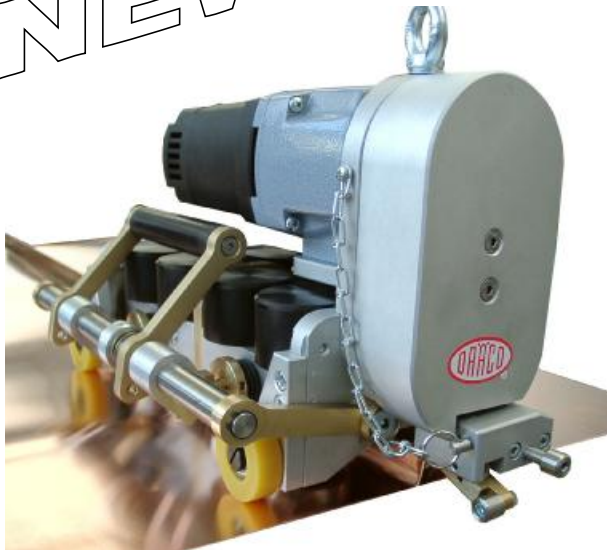

K9-1 with dual-safety switch K9-1-DF

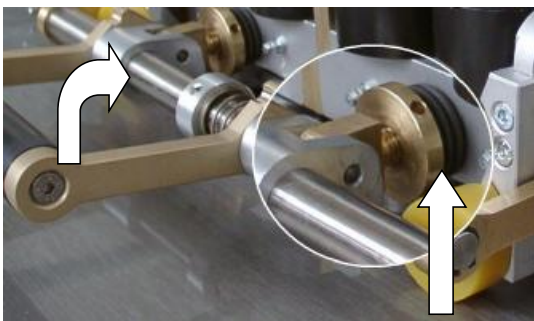

- Variable Pressure Adjustment K9-ASS to achieve an optimum closed seam
- Locking handle moveable, down or up away from obstructions as windows, chimneys,

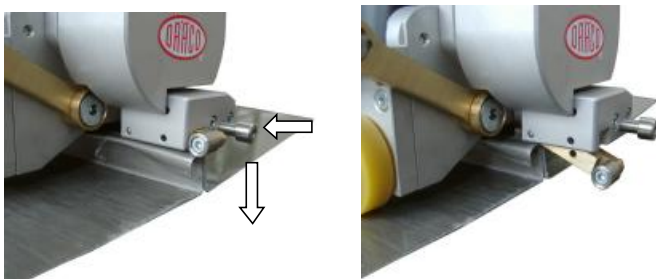

The patented DUAL-Safety-Switch K9-1-DF, stops the K9-1 automatically at the end of a seam, wall or obstruction



K 9-AR cutting rolls set, ideal for roof, wall and façade renovation or repair. No damage to roof deck, no expensive demolition required. Indispensable for fast and safe dismantling of double lock and standing seam (cutting speed 2-12 m/min.).

Technical improvements can be changed without prior notice

Automatic Power Seamer K9-1 including metal-case



Power Seamer K9-1-WAD is a new combination of DRACO patented functions all together.

New is the variable speed control to close panels in Summer or in Winter time, (ideal in combination with the Winter Set, especially at low outside temperatures.) The K9-1 can be used for forward and reverse operation, in combination with the dual safety switch, which stops the machine automatically, at the end of the panel or against an obstruction. SAFETY FIRST ON SITE IS OUR ENDEAVOUR. A remote for forward and reverse control is available, to close panels at the façade or wall as an optimal extra.


	Art. No.:	115 or 230 V / 1150 W	kg±
K9-1	91560-1	for double lock seam	22
K9-1-WAD	91565-1	* complete version	23

* incl. set of forming rolls f. single seam, set of cutting rolls, dual-safety-switch, variable pressure adjustment, variable speed control, remote for forward and reverse

- for double lock seaming in one pass
- two additional rolls K9-WR for single lock seaming
- sheet metal, aluminium, copper, zinc weathered or coated up to 0,8 mm; stainless steel up to 0,5 mm
- **adjustable for seam heights 25-60 mm**
- clean transition at cross seams by using variable pressure adjustment K9-1-ASS
- working speed 2-12 m/min. up the wall and on the roof
- maintenance-free, safe operation
- no damage to painted or coated sheets
- can be used or removed in the middle of a seam (preliminary hand-seaming required)
- accessory: dual safety switch for safe operation at the wall and roof. The Power Seamer stops automatically at the end of the seam, against a wall or obstruction
- barrel curved roofs can be seamed using single or double lock system to the minimum radius 1,2 m
- seam cutting can be accomplished by using cutting rolls K9-1-AR for roof and wall renovation and repairs

Multifunctional by various accessories:		Art. No.:
■ set of forming rolls f. single seam	K9-1-WR	*
■ set of cutting rolls	K9-1-AR	*
■ dual-safety-switch	K9-1-DF	*
■ variable pressure adjustment	K9-1-ASS	*
■ remote control	K9-1-KF	
■ winter set, adjustable 3000W, 650°C, 550l/min.	K9-1-WS	

* included in complete set K9-1-WAD

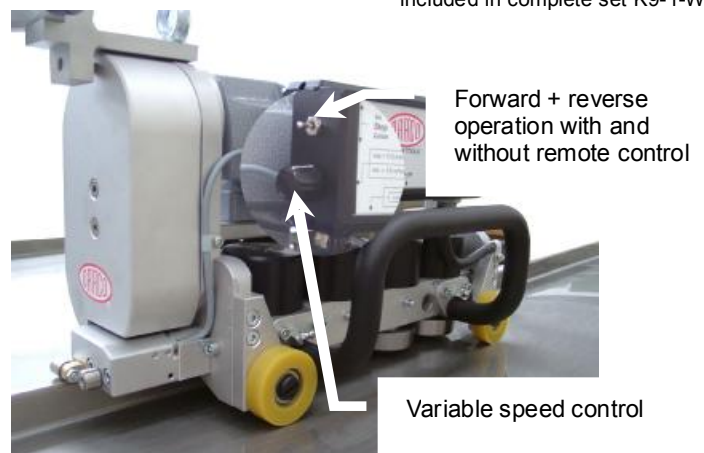

Forward + reverse operation with and without remote control

Variable speed control