

NEW




Power Seamer K9-1-ERB incl. metal case for different Round Profiles Profile height 48-65 mm



K9-1-ERB

Item:	Item. No.	1150 W	Kg ±
K9-1-ERB	91592	230V / for round profiles	16
K9-1-ERB	91595	115 V/ for round profiles	16

inclusive fold opening roll and metal case.




Increasingly Tinsmith specialized companies, engage themselves with the assembling of self-feeding Roof Profile Panels. Especially to close the seam of industrial manufactured profiles, DRACO developed a multilaterally, usable Power Seamer K9-1 ERB. The machine can close straight, tapered, convex or concave Profiles of many manufacturers. The seamer has a ingenious pressure adjustment. The pressure can be adjusted variable, to achieve an optimum closed seam. Working speed of the machine is variable, from 9 - 18 m/min, whereby a remote control (as an option) can be assembled to the machine, especially for working on a steep roof or vertical wall.


The Power Seamer K9-1-ERB can be used to close round profiles in forward or backward motion

For example:

Round profile nominal diameter closed: 20 mm,
minimum panel width: from 230 mm and 48-65 mm profile height of all current suppliers. Supporting legs adjustable. (Nov. 2008)

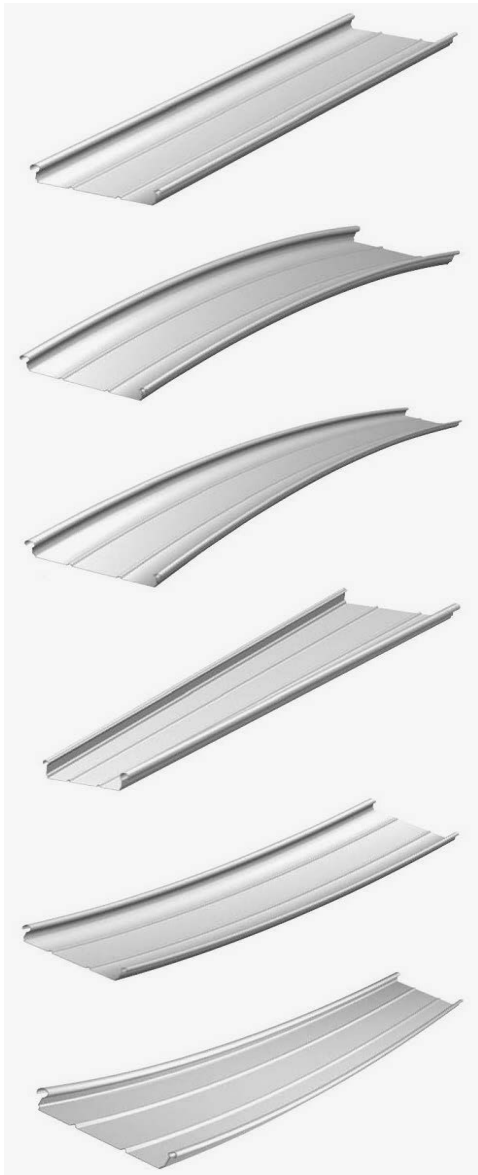


Useable for straight, conical, convex or concave rounded profiles

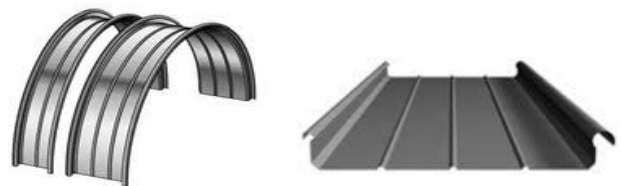


- No damage to painted or coated sheets
- **For profile heights from 48 - 65 mm**
- Variable working speed: 9 -18 m/min.
- Clean transitions at the clips, due to disc - spring-washer technology (the seamer K9-1-ERB, aligns itself on thicker materials).
- Variable pressure adjustmentK9-1-ASS for an optimum seam
- Barrel shaped – or vaulted roofs, a radius from 2,0 meter and up can be closed.
- Can be used in the middle or removed from the seam.
- To dismantle for restoration, repair, or to open up a seam, use the Fold Opening Roll K9-ERB-AR.
- As an option, Remote Control K9-1-KF, for forward-stop-reverse operation, with 12 meter cable

Fold opening roll K9-1-ERB-AR

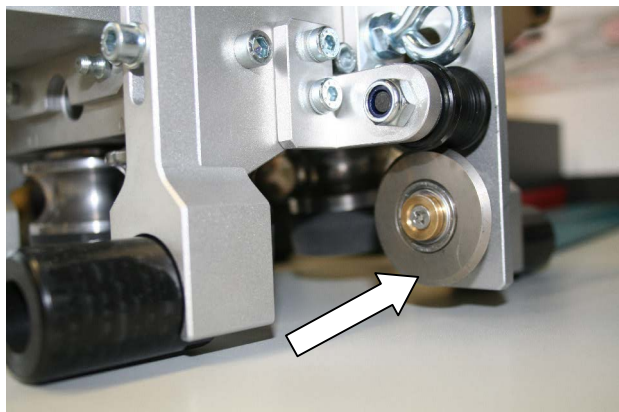


Fold opening roll K9-1ERB-AR, irredeemable for dismantling a roof or single panels.

For forward-stop-reverse operation, with or without the remote control K9-1-KF

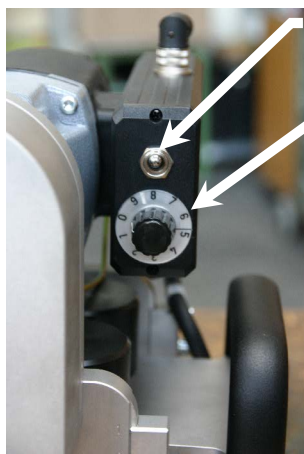


Switch for forward and reverse operation.

Variable Speed Control



Variable Pressure Adjustment
K9-1-ERB-ASS

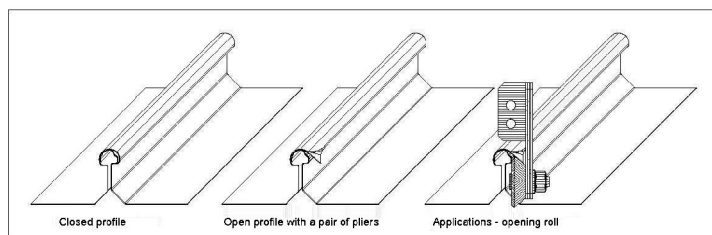

K9-1-ERB with Remote Control K9-1-KF

Item:	Item. No.:	Description	Length
K9-1-KF	91660-12	Remote control	12m

Other cable lengths available on request

As an option, the remote control K9-1KF can be assembled to the seamer. This remote control is ideal to close a panel on the facade or wall, convenient from the ground. It can be used on top of the roof to close barrel curved or vaulted panels. Due to the remote control for forward, stop and reverse operation, the operator can back up the seamer to the starting point, without to proceed to the machine.

In the reverse operation, automatically the dead man's handle is activated. Therefore the START-Button must be pressed in the reverse operation at all times, to activate the machine. This is for safety reasons.

Hand Seamer RA 140 or RA 141, is ideal for starting, at the end or for fixing the roof panel, and areas with difficult access.

RA 140 Hand Seamer for round profiles

Item. N°.		L mm		
RA140	To close round seams	220	2600	1

RA 141 Hand Seamer for round profiles standing*

Item. N°.		L mm		
RA141	To close round seams	220	3800	1

*Standing tool



RA140



RA141*

All machines and tools in this leaflet, can be changed for improvement, without prior notice.

Max Draenert Apparatebau GmbH & Co. KG
Germany

D-73777 Deizisau Postfach 1120
D-73779 Deizisau Gutenbergstrasse 15-17
www.dracotools.com

07153-8217-0
 07153-8217-66
draenert@dracotools.com